

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 468 619 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**20.10.2004 Bulletin 2004/43**

(51) Int Cl.7: **A41D 13/01**

(21) Application number: **03425237.9**

(22) Date of filing: **17.04.2003**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK**

(72) Inventors:  
• **Bartoli, Cesare**  
**24040 Scanzorosciate (BG) (IT)**  
• **Parisi, Agostino**  
**24040 Scanzorosciate (BG) (IT)**


(71) Applicant: **Industria Bergamasca Rifrangenti  
S.r.l.**  
**24040 Scanzorosciate (BG) (IT)**

(74) Representative: **Garavelli, Paolo et al**  
**A.BRE.MAR. S.R.L.,**  
**Via Servais 27**  
**10146 Torino (IT)**

**(54) Method for producing printed retroreflective high visibility products**

(57) The invention relates to a retroreflective high visibility printed product on a substrate including fabrics as well as other textile substrates for use in personal articles such as attractive high visibility clothing, sportswear, footwear and accessories with good design flexibility; the method ensures trend-setting fashion sense as well as safety sense and is characterized by using a

continuous, flexible process of selective demetallization of an etchable aluminum layer for obtaining printed images. The method involves the application of two mirror layers on the glass microspheres (1): an aluminum mirror (3) layer selectively exposed to a demetallizing chemical solution and a dielectric mirror (7) which provides the ability to obtain high value of reflectivity.

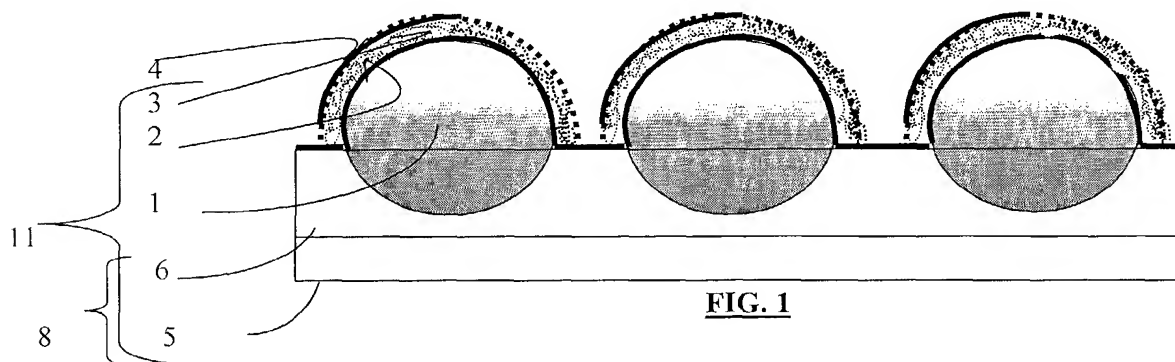

**FIG. 1**

**EP 1 468 619 A1**

**Description**

**[0001]** The present invention refers to a method for producing printed retroreflective high visibility products.

**[0002]** It is verified that retroreflective products used for safety garments can reduce risk of accident especially for people who live in an outdoor society, such as firemen, paramedics, policemen and every adult and children that performs biking, hiking, running, playing or walking.

**[0003]** The commercial products suitable for reflective garments have generally been single colored. For example, in US-A-4.763.985, US-A-5.283.101, US-A-5.738.746, launderable retroreflective gray metal colored are disclosed. Other patents describe the possibility to obtain colored effects and printed effects as well as reflective quality.

**[0004]** A retroreflective structure described in US-A-5.962.121 is capable of exhibiting a decorative effect, both during the day and during the night, and particularly a rainbow colored effect. In US-A-4.605.461 a method is disclosed for transferring a retroreflective pattern onto a fabric. Retroreflective images formed on garments and other substrates are described in US-A-4.102.562. US-A-5.508.105 discloses a thermal printing system and a resin-based colorant/binder for printing frangible, retroreflective polymeric sheeting material. US-A-5.620.613 discloses retroreflective multi-colored designs or emblems on garments comprising a monolayer of transparent microspheres, a color layer with colorant in a transparent resin screen printed over the glass beads. When the prints of the first color are all dried, they may be printed and dried with subsequent colors until all the desired colored portions of the image are complete. For decorating textile surfaces with a transfer, US-A-5.679.198 discloses a printing step on a support sheet that has, as a layer of microspheres embedded therein, one or more colored layers that are prepared from a polyester resin and an isocyanate hardener, drying each color layer separately before the next layer is printed. The process for decorating textile surfaces with images comprising light-reflecting areas is described in US-A-5.785.790. In this case, the layers of glass microspheres are printed by one or more coatings of two-component colors based on polyester resin and isocyanate hardener. A silk screen-printing machine is used for printing the layers in an image wise inverted fashion on the support sheet of the glass beads. US-A-3.689.346, US-A-5.643.400, US-A-4.082.426, US-A-2.231.139, US-A-2.422.256, US-A-4.656.072, US-A-4.952.023 and US-A-4.685.997 describe processes for producing retroreflective materials having printed patterns or graphics formed thereon. US-A-6.120.636 discloses a higher speed, low cost process for producing printed patterns for graphic, decorative and other retroreflective sheeting using partially cured pattern printed on a roll of film produced with a rotary screen printing station and UV curing. A polychromatic printed reflective material whose trade name is Flashlite® PR is manufactured by I.B.R., Italy.

**[0005]** A selective aluminum removal process from a metallized substrate as indicated in WO-A-02-089.338 and US-A-2002-160.786 for obtaining printed images is used in an identification device including, for example, a holographic, retroreflective metallized image. Demetallizing to create moiré patterns for security applications and external packaging is described in US-A-2002-130.104.

**[0006]** US-A-4.398.994, US-A-4.552.614, US-A-4.869.778 and EP-A-0936286 describe continuous procedures for the selective demetallization of etchable metal for decorative packaging and microwave transparent material. Demetallizing techniques are also described in US-A-4.325.167, US-A-3.119.919, US-A-3.895.207 and US-A-5.061.837 by bringing the web into contact with two electrodes comprising rollers, one of which may be provided with a predetermined pattern and using the web material as microwave packaging material.

**[0007]** Despite the above prior art, the cited patents regarding aluminum removal process are used on a web of polymeric material without reference to a metallized monolayer of glass microspheres embedded in a carrier sheet, which is a peculiarity of the present invention, and without reference to specific reflective quality of the product useful for safety high visibility fabrics with enhanced aesthetics of clothing. Thus, there is a need for a process that permits selective or partial removal of the aluminum mirror but maintains high value of retroreflective performance. To obtain high value of retro-reflection the invention involves the application of two kinds of mirrors: the aluminum mirror making a pattern which remains on the base of the glass microspheres and the transparent dielectric mirror which covers the portions of etched surface. The dielectric mirror permits light reflection and transmission. Consequently, the color of the binder layer is visible between the small space of the beads and through the glass beads where aluminum has been removed by the etching solution. If the binder layer is not colored, the color of the base fabric combined with the printed aluminum images brings about fashionable chromatic effects with strong retro-reflex in darkness.

**[0008]** The printed material of the present invention has the property of reflecting the light in the same direction of the incident light and a person wearing the garment made with this material can be highly visible to drivers at night.

**[0009]** According to the above-cited WO-A-02-089.338, the invention relates to the manufacture of an identification device created with a metallized material such as a retroreflective material, and the demetallizing process used in this and other above-cited patents creates a metallized pattern (called "isle") in a demetallized surface (called "sea"). If the metallized isles are a small surface, the total reflection of the incident light indicated with the coefficient of retro-reflection ( $\text{cd/lx.m}^2$ ) is low and the final product, even if containing a retroreflective pattern, is not suitable for high visibility retroreflective applications (e.g. high visibility printed garments, products for nighttime transportation and safety).

**[0010]** The present inventors have discovered a process which allows combining characteristics of high visibility and

polychromatic aesthetic printing. Independently of the type of printed design, either the design looks with many aluminum reflective isles or only a few, the specific requirements for the minimum value of the coefficient of retro reflection  $\text{cd/lx.m}^2$  indicated by European Standards EN 471/ 1994 (250  $\text{cd/lx.m}^2$ , entrance angle  $5^\circ$ , observation angle  $0.33^\circ$ , class 2, regarding high visibility warning clothing) and EN 13356/ 2001 (80  $\text{cd/lx.m}^2$ , entrance angle  $5^\circ$ , observation angle  $0.33^\circ$ , type 2 and 3, referred to visibility accessories for non-professional use) are obtained.

**[0011]** According to the invention, a high visibility printed retroreflective product is provided that includes a retroreflective web with microspheres thereon in a desired temporary arrangement. In this invention, a temporary support sheet with a monolayer of transparent glass microspheres partially embedded in a layer of softened polymer to a depth between one-quarter and one-half of their average diameter such as are conventionally used in retroreflective materials, is coated with a thin layer of two-component polyurethane, less than about 3 g/sqm of dry substance, before the vacuum application of an aluminum-reflecting layer upon the surface of glass microspheres as described in US-A-3.700.305 and US-A-6.416.188. The temporary support sheet with a monolayer of transparent glass microspheres partially embedded in a layer of auto-adhesive, for example a layer of polyacrylic polymer supported by a polyester film instead of a layer of thermo-adhesive, can be used. In this case, a water polyurethane dispersion is used and the catalyst is an aliphatic polyisocyanate.

**[0012]** According to the present invention as claimed in Claim 1, a process is provided for pre-printing the metallized glass microspheres web with an etching-resistant material to the etchable metal layer corresponding to a desired pattern of non-etchable aluminum, allowing the etching solution to react with the aluminum layer to demetallized the non-protected surface, washing with water and drying the microspheres web.

**[0013]** It is well known that corrosion of aluminum generally occurs with acids or bases and with complex forming agents. Chemical agents able to dissolve the protective layer of the aluminum oxide will permit the corrosion of the underlining metal. In the present invention, an etching solution of sodium hydroxide is used, containing from 5% up to 25% of NaOH, but the concentration could be changed depending of the speed and of the temperature of the process. Additives are also used, such as organic complex forming agents like EDTA, which fix the Al ion in the form of soluble complexes.

**[0014]** According to the invention, the polyurethane resin used in the first coating upon the surface of the beads and in the binder layer is a polyester polyurethane polyol polymer 40/50% concentration in organic solvent (Methyl Ethyl Ketone, Ethyl acetate, N,N-dimethylformamide). The curing agent is an aromatic polyisocyanate or a mixture of polyisocyanate and a melamine resin. The application of the first coating is generally made with a knife-on-air coater or with a graved roll while the second binder layer is coated with a knife-on-roll coater. The industrial coating and finishing machines are widely used in the textile and synthetic leather industries.

**[0015]** Still according to the invention, a special feature is the double mirror layers. The first non-transparent aluminum mirror which is partially etched over the "isle surface" of the glass beads gives a high value of coefficient of retro-reflection, generally up to 500  $\text{cd/lx.m}^2$  corresponding to the requirement indicated by the EN 471/1994 regarding high visibility warning clothing. The application of a second transparent dielectric upon the "sea surface" of the glass beads reach a coefficient of retro reflection around 100-150  $\text{cd/lx.m}^2$  corresponding to the requirement indicated by European Standard EN 13356/2001, referred to visibility accessories for non-professional use.

**[0016]** The present invention further provides a polyurethane two-component binder and a textile base for the specific article of clothing made with the retro-reflecting printed surface. The fabric could be a plain fabric, a knitted fabric, a non-woven made with natural or synthetic fibers. The hand of the base fabric is very important for the purpose of an article of safety clothing. Examples of "article of clothing" that may use the retroreflective printed of the invention includes shirts, sweaters, coats, pants, hats, suits, shoes, bags, etc.

**[0017]** The invention will be further explained with reference to the figures, which are not to scale and are intended to be merely descriptive and non-limiting, and in which:

- Fig. 1 is a cross-section illustrating a schematic carrier web, which secures microspheres thereon in a desired temporary arrangement and showing one embodiment of the invention just before the demetallizing effect on the non protected aluminum layer;
- Fig. 2 is an enlarged partial view in section in accordance with the present invention as it appears after the treatment with the etching solution;
- Fig. 3 is an enlarged partial view in section in accordance with the present invention as it appears after the deposition of the dielectric layer;
- Fig. 4 is a cross section of a portion of an article 13 for clothing in accordance with the present invention having a fabric 10 with a retroreflective printed layer thereto and with a temporary carrier sheet partially removed;
- Fig. 5 is a schematic plan view showing the calender machine used for transferring the thermoadhesive pattern upon the composite microspheres web in accordance with the present invention;
- Fig. 6 is a view of a printed image upon the retroreflective layer.

[0018] In the preferred embodiments described in this invention, a specific terminology is used for the sake of clarity. The term "isles" is hereinafter used to designate the surfaces of the printed design formed by the aluminum layer protected with the non-etchable resin. The term "sea" is hereinafter used to designate the non-metallized surfaces. The embodiment examples are intended to illustrate the invention without limiting it in any way and is not intended to be limited to the specific terms so selected and it is to be understood that each term so selected includes all technical equivalents that operate similarly.

[0019] Fig. 1 shows a cross section view of the carrier web 8, which secures microspheres 1.

[0020] The carrier web used as a sheet material produced as described in US-A-4.102.562. The microspheres used in the present invention typically have an average diameter in the range of about 30 to 200 microns and a refractive index of about 1.5 to 2.0. Preferably glass microspheres 1 are arranged substantially in a monolayer on a temporary carrier sheet 8, which comprises a polymeric coating 6 and a stiff backing 5. The polymeric coating 6 is a softenable material such as polyethylene, polypropylene and the like. The stiff backing 5 could be kraft paper, polyester film and the like. The microspheres may be arranged upon the temporary carrier sheet 8 by cascading, transferring, and screening or any convenient transfer process. The microspheres 1 are embedded in the carrier sheet 8 with a pressure roll or by heating the softened polymer, preferably to a depth between about 35 to 40 percent of their average diameter. The two-component polyurethane priming layer 2 is covered with a vapor coated layer of an aluminum 3. The isles are then obtained by transfer printing the aluminum with the non-etchable layer 4 using the machine illustrated in the schematic drawing of Fig. 5.

[0021] Fig. 2 shows a cross section corresponding to Fig. 1 after the application of the etchant solution of NaOH. The aluminum layer protected by the thermoplastic resin remains whereas the non-protected aluminium is completely removed by the aqueous sodium hydroxide solution uncovering the priming layer 2.

[0022] Fig. 3 shows a cross section corresponding to Fig. 2 after the application of the transparent dielectric mirror 7, which substitutes the non-transparent aluminum mirror etched by NaOH solution and consequently increases considerably the retroreflective performance of the sea surface.

[0023] Fig. 4 shows a idealized, not-to-scale sectional view of a portion of an article of clothing 13 at the final stage of production in accordance with the present invention. In the drawing, the final product 13 is partially delaminated from the carrier web 8 comprising the polymeric coating 6 and the kraft paper or polyester film 5. A binder layer of two-components polyurethane adhesive 9 is that of providing an adequate adhesion with the fabric 10, for example a polyester/cotton, a knitted nylon fabric or a polyester nonwoven base.

[0024] Fig. 5 is a schematic plan view showing a calender for transferring the design printed 15 unrolled from cylinder 16 to the composite microspheres web 11 from cylinder 14. The apparatus used in this invention includes a well-known rotary machine made up with a heated roll 18 and a felt 17. The printed design is generally made with an acrylic resin or polyamide thermoplastic resin. We have used a special polypropylene printed film Decotrans® from Miroglio, Alba, Italy. The base without printing 19 is unrolled in 22 while the printed web 20 is unrolled in 21.

[0025] Fig. 6 is a view of a printed image upon the retroreflective layer. The "isles" of the image are the printed flowers and the "sea" the background. The coefficient of retro-reflection over the isles is around 500 cd/lx.m<sup>2</sup> and over the sea is about 100/150 cd/lx.m<sup>2</sup>. If the transparent dielectric mirror is not used, the value of the coefficient of retro-reflection over the sea would be less than 15 cd/lux.m<sup>2</sup>.

[0026] The invention will be further explained by the following illustrative examples, whose purpose is showing the features and advantages of this invention. However, the ingredients and the specific amounts recited therein, as well as other conditions and details, are intended to be not limiting the scope of this invention. Unless otherwise indicated, all amounts expressed in the examples are in parts by weight.

#### EXAMPLE 1

[0027] In Example 1, glass spheres with a refractive index of 1.93 and a diameter from 45 up to 100 micrometers, were cascaded on a Kraft paper covered with an acrylic auto-adhesive film and produced the monolayer of glass microspheres having diameters between 40 and 100 microns. The layer of beads was then transferred onto a support sheet of polyester covered with a low-density polyethylene thermo-adhesive film material 8, in fig. 1 with a thickness of 50 microns. The transfer was made with a heated calender having a cylinder 18 and a felt 17 as in fig 5. The temperature of the heated cylinder was about 140°C. The contact time was 5 seconds and the pressure between the cylinder and the felt was 5 bars, in order to obtain a penetration of the beads onto the polyethylene film of about 40 percent of their diameter. A two-components polyurethane priming layer was next applied by roll-coating a solution of the following formulation 1 with a doctor knife-coating machine or a graved-roll coating machine:

Ingredients	Parts by Weight
Polyurethane resin (B 10 from Coim, Italy)	100

(continued)

Ingredients	Parts by Weight
Isocyanate curing agent ("Icaplink X3" from Icap)	5
Methyl Ethyl Ketone	150
Formulation 1	

**[0028]** The polyurethane resin was a reaction product of a polyester polyol having a number molecular weight of at least 2,000 and a polyisocyanate. The resin was dried and partially cured at 110°C. The quantity of dry transparent film layer was about 2 g/sqm. The spheres coated side was then vacuum metallized with aluminum to provide a reflective layer of about 0.5 up to 1 micrometer thickness. The reflective layer did not contact those portions of the spheres surface imbedded in the polyethylene film of the carrier. Subsequently the retroreflective portion 11 of fig. 1 was conveyed into the calender shown in fig. 5 and the thermoplastic design printed on a release polypropylene support (Decotrans® From Miroglio, Italy) was transferred upon the surface of the aluminum layer. The roll of material 21 of fig. 5 printed with a sodium hydroxide-resistant resin was next conveyed in a etchant aqueous sodium hydroxide solution, corresponding to 25 wt.% at a temperature of about 20°C. The contact time was about 30 sec. The web was then washed to leave the design of etchant-resistant thermoplastic transparent resin and dried in a continuous oven. The apparatus for demetallizing, washing and drying was the same commonly used in textile industries and utilizes rollers dipping into bath of liquids and hot air oven for the final drying step. All the process is continuous. The spent sodium hydroxide was conveyed in a waste treating plant used for water treatment in finishing textile industries.

**[0029]** The surface of the thermoplastic printed design (isles) was about 30% of the total surface. The image is shown in fig. 6. Consequently, the non-retroreflective surface (sea) was 70% of the total surface. To achieve the maximum retroreflective value, the printed side of the web was then vacuum coated with a transparent dielectric mirror 7, in fig. 3, of Na<sub>3</sub>AlF<sub>6</sub> to form a first dielectric layer of about 0.8 micrometer and ZnS to form a second dielectric of about 0.5 micrometer over the sea region. The total thickness of the dielectric mirrors was about 1 micrometers.

**[0030]** A binder 9 in fig. 4 comprising 100 parts by weight of the following formulation :

Ingredients	Parts by Weight
Polyurethane resin (B 10 from Coim, Italy)	100
Melamine curing agent Isocyanate curing agent ("Icaplink X3" from Icap)	3 5
Methyl Ethyl Ketone	40
Formulation 2	

was applied using a knife on roll coating over the printed layer at approximately 200 microns wet thickness. The resin was dried at 80°C. At the end of the oven the surface of the resin was superposed and calendered on a polyester/cotton fabric containing 65 percent of polyester and 35 percent of cotton. After calendering the laminated compound at 100 °C and a pressure of 5 bars, the compound was cooled and the material 8 of fig. 4 was peeled off. Subsequently the printed retroreflective textile was cured at 150 °C for 2 min. The initial coefficient of retro-reflection was between 150 and 350 cd/lx.m<sup>2</sup>. The maximum value was checked upon the isles of aluminum mirror and the minimum upon the sea of dielectric mirror. The material obtained with this process was suitable for visibility accessories for non-professional use corresponding to EN 13356.

## EXAMPLE 2

**[0031]** In Example 2, a monolayer of glass microspheres having similar characteristics to those mentioned in Example 1 was deposited onto the low density 50 microns polyethylene film supported by a 40 microns polyester carrier. The glass spheres-covered carrier was then heated for 2-4 min at 150°-160°C and penetrated into the softened polyethylene. The glass beads thus become embedded in the polyethylene for about 40 percent of the sphere diameter and form a monolayer therein with little or no space between spheres. A two-component polyurethane priming layer (formulation 1) was next applied, followed by vacuum aluminum deposition, transfer printing and etching-treatment as described in Example 1. The transfer printing Decotrans® used was a design having a large surface of isles corresponding to about 80% of the total surface.

**[0032]** A colored binder 9 in fig. 4 comprising 100 parts by weight of the following :

Ingredients	Parts by Weight
Polyurethane resin (B 10 from Coim, Italy)	100
Yellow pigment (Morton, Italy)	5
Reflective Flake Powder (Bracco, Italy))	5
Melamine curing agent	3
Isocyanate curing agent ("Icaplink X3" from Icap)	5
Methyl Ethyl Ketone	40
formulation 3	

was applied using a knife on roll coating over the printed layer at approximately 200 microns wet thickness. The coating with a transparent dielectric mirror and the subsequent steps of production were the same as described in Example 1. The initial coefficient of retro-reflection was around 400 cd/lx.m<sup>2</sup>. The material obtained with this process was suitable for high visibility warning clothing and accessories corresponding to EN 471/1994.

### EXAMPLE 3

[0033] In Example 3, the monolayer of glass microspheres having diameters between 40 and 100 microns was produced by cascading the beads onto a polyethylene film supported by a polyester backing as indicated in Example 2. A two-component polyurethane priming layer (formulation 1) was next applied as in the first example, followed by vacuum aluminum deposition. The aluminum-coated layer of microspheres was selectively exposed to a demetallizing solution using a screen printing machine or printing roll (Stork) of a rotative textile machine. Specifically, in this example a roll printing has been used, followed by a continuous washing textile machine and a drying oven.

### EXAMPLE 4

[0034] In Example 4, the monolayer of glass microspheres having diameters between 40 and 100 microns was produced by cascading the beads onto a polyester foil covered with an acrylic auto-adhesive film as described in US-A-4.075.049. The resulting microspheres composite was doctor-knife coated with a two-components polyester-polyurethane water dispersion having the following formulation:

Ingredients	Parts by Weight
Water dispersion polyurethane (Idrocap resin from Icap, Italy)	100
Poly-isocyanate curing agent	5
Thickening PU agent	1-3
Formulation 4	

[0035] The resin was dried and partially cured at 110°C. The quantity of dry transparent film layer was about 2 g/sqm as in Example 1, followed by vacuum aluminum deposition. The aluminum-coated layer of microspheres was selectively exposed to a demetallizing solution using a screen printing machine or printing roll of a rotative textile machine as mentioned in Example 3.




### Claims

1. Continuous method for producing a printed retroreflective material for making articles of clothing, said articles of clothing having aesthetic look, good laundering durability and high visibility corresponding to specific requirements for a minimum coefficient of retro-reflection (cd/lx.m<sup>2</sup>) indicated by European Standard EN 411/1994 (related to high visibility warning clothing) and/or EN 13356/2001 (related to visibility accessories for non-professional use), said method comprising the steps of:



- (a) providing a carrier sheet with an adhesive on the carrier;
- (b) partially embedding onto the adhesive a monolayer of transparent glass microspheres having a refractive

index between about 1.4 and about 2.7, to a depth averaging around 35-40 percent of their average diameters;  
 (c) coating a thin layer of a two-component polyurethane resin;  
 (d) applying a specularly reflective mirror of aluminum by vacuum deposition;  
 (e) printing a non-etchable pattern onto the aluminum layer;  
 (f) passing said web material through a demetallization bath of sodium hydroxide and a washing station to  
 remove etchable, non-protected surface and drying the web;  
 (g) applying, by a vacuum process, two layers of dielectric mirror;  
 (h) coating a polyurethane binder layer and laminate with a textile base;  
 (i) stripping away the support layer.


2. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the carrier sheet has an heat-softenable adhesive layer on the carrier.
3. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the carrier sheet is an auto-adhesive layer supported by a polymer backing.
4. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the polyurethane resin is a reaction product of a polyester polyol having a number molecular weight of at least 2,000 and a polyisocyanate.
5. Method for manufacturing a printed retroreflective material according to Claim 4, **characterised in that** the dry polyurethane resin on the glass beads is less than about 3 g/sqm of dry substance.
6. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the polyurethane resin used for coating the glass web is a water-dispersion and the curing agent is an aliphatic polyisocyanate.
7. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the polyurethane resin used for coating the glass web is a polyester polyol isocyanate in solvent and the curing agent is a polyester polyisocyanate.
8. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the transfer image used for printing the coated microspheres is made with a non-etchable NaOH resin.
9. Method for manufacturing a printed retroreflective material according to Claim 8, **characterised in that** the thermoplastic resin used for the printed base is a polyurethane, a polyamide or a polyacrylic polymer.
10. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the base transfer non-etchable printing is a release paper, a polypropylene or polyester foil.
11. Method for manufacturing a printed retroreflective material according to Claim 10, **characterised in that** the transfer printed base is Decotrans®, manufactured by Miroglio, Italy.
12. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the non-etchable transfer pattern is replaced by a silk-screen printing or roll printing on the reflective aluminum layer.
13. Method for manufacturing a printed retroreflective material according to Claim 1, **characterized in that** the transparent dielectric mirror is a layer of aluminum sodium fluoride ( $\text{Na}_3\text{AlF}_6$ ) overlaid by a layer of zinc sulfide ( $\text{ZnS}$ ).

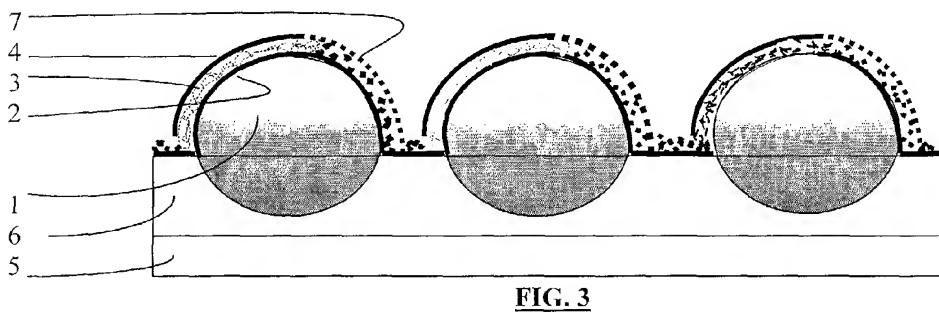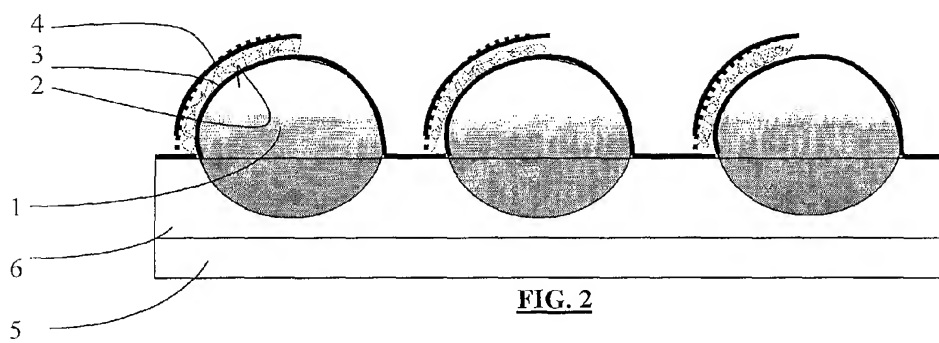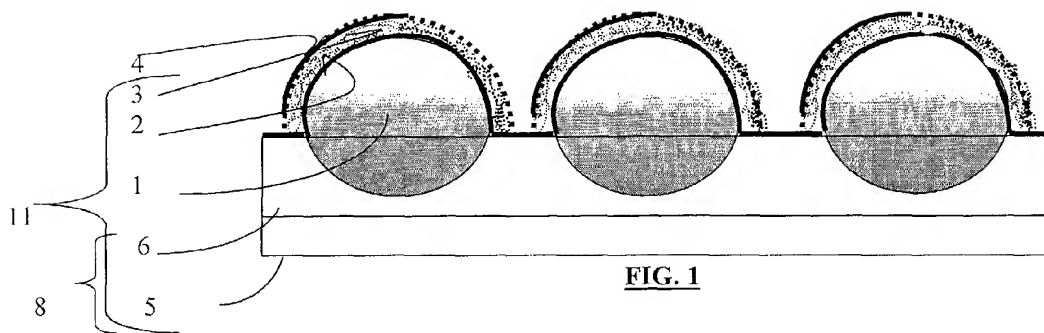



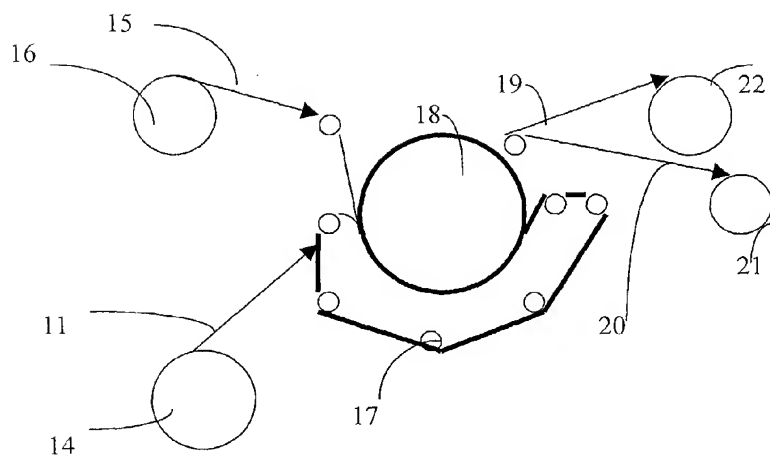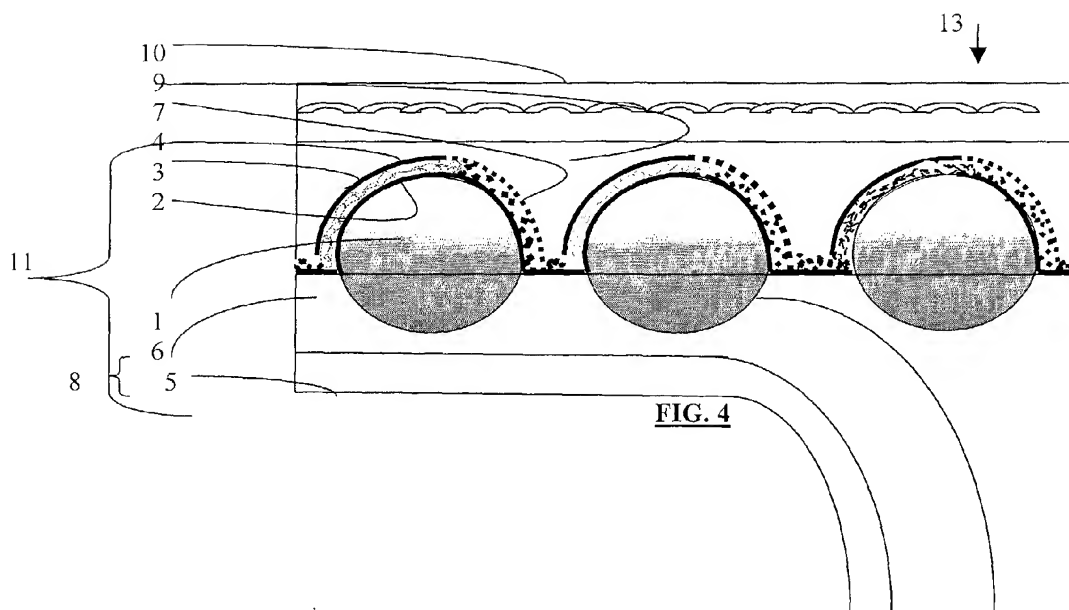

**FIG. 5**

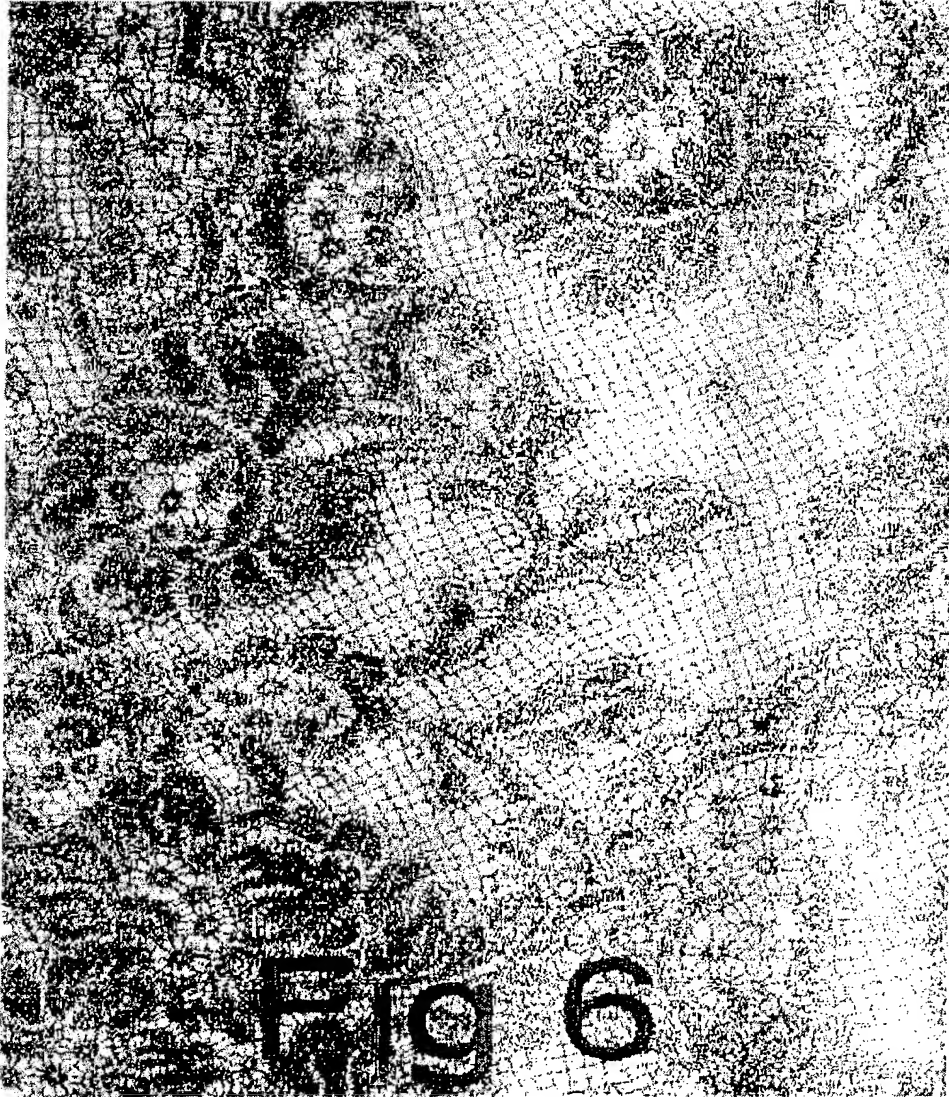



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 03 42 5237

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 338 595 A (LI WU-SHYONG) 16 August 1994 (1994-08-16) * column 2, line 66 - column 5, line 6; figures 1,2 *	1-13	A41D13/01
A	US 6 110 558 A (BILLINGSLEY BRITTON G ET AL) 29 August 2000 (2000-08-29) * column 4, line 1 - column 7, line 58; figures 1,2 *	1-13	
A	US 2002/037364 A1 (FLEMING ROBERT J) 28 March 2002 (2002-03-28) * column 3, paragraph 38 - column 6, paragraph 60; figures 1,2 *	1-13	
A	US 4 682 852 A (WEBER VICTOR) 28 July 1987 (1987-07-28) * column 4, line 28 - column 10, line 27; figures 2-10 *	1	
D,A	WO 02 089338 A (RIEZLER MANFRED ;INTEC HOLDING GMBH (DE); BNC S A DE C V (MX); MAR) 7 November 2002 (2002-11-07) * page 15, line 26 - page 19, line 12; figures 1,4,8,9 *	1	
The present search report has been drawn up for all claims			<b>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</b>  A41D G02B B05D B44C
Place of search <b>MUNICH</b>		Date of completion of the search <b>15 October 2003</b>	Examiner <b>Herry-Martin, D</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 08/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 42 5237

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-10-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5338595 A	16-08-1994	US 5451447 A	19-09-1995
		AU 649781 B2	02-06-1994
		AU 1129192 A	12-11-1992
		CA 2061708 A1	09-11-1992
		DE 69209137 D1	25-04-1996
		DE 69209137 T2	28-11-1996
		EP 0512668 A2	11-11-1992
		ES 2084931 T3	16-05-1996
		JP 3300400 B2	08-07-2002
		JP 5111406 A	07-05-1993
		MX 9201636 A1	01-11-1992
US 6110558 A	29-08-2000	US 5738746 A	14-04-1998
		AU 2198595 A	23-10-1995
		CA 2184272 A1	12-10-1995
		CN 1144462 A ,B	05-03-1997
		DE 69505509 D1	26-11-1998
		DE 69505509 T2	08-04-1999
		EP 0754002 A1	22-01-1997
		ES 2122576 T3	16-12-1998
		JP 9511286 T	11-11-1997
		WO 9526648 A2	12-10-1995
US 2002037364 A1	28-03-2002	US 6306459 B1	23-10-2001
		AU 1599300 A	09-01-2001
		CA 2375420 A1	28-12-2000
		CN 1352749 T	05-06-2002
		EP 1185893 A1	13-03-2002
		JP 2003502707 T	21-01-2003
		WO 0079315 A1	28-12-2000
US 4682852 A	28-07-1987	JP 61063801 A	02-04-1986
WO 02089338 A	07-11-2002	DE 10121126 A1	07-11-2002
		WO 02089338 A2	07-11-2002
		US 2002160786 A1	31-10-2002

**PUB-NO:** EP001468619A1  
**DOCUMENT-IDENTIFIER:** EP 1468619 A1  
**TITLE:** Method for producing printed  
retroreflective high visibility products  
**PUBN-DATE:** October 20, 2004

**INVENTOR-INFORMATION:**

NAME	COUNTRY
BARTOLI, CESARE	IT
PARISI, AGOSTINO	IT

**ASSIGNEE-INFORMATION:**

NAME	COUNTRY
IND BERGAMASCA RIFRANGENTI S R	IT

**APPL-NO:** EP03425237

**APPL-DATE:** April 17, 2003

**PRIORITY-DATA:** EP03425237A (April 17, 2003)

**INT-CL (IPC):** A41D013/01

**EUR-CL (EPC):** A41D013/01 , B44C001/22 , G02B005/128

**ABSTRACT:**

CHG DATE=20041026 STATUS=O>The invention relates to a retroreflective high visibility printed product on a substrate including fabrics as well as other textile substrates for use in personal articles

such as attractive high visibility clothing, sportswear, footwear and accessories with good design flexibility; the method ensures trend-setting fashion sense as well as safety sense and is characterized by using a continuous, flexible process of selective demetallization of an etchable aluminum layer for obtaining printed images. The method involves the application of two mirror layers on the glass microspheres (1): an aluminum mirror (3) layer selectively exposed to a demetallizing chemical solution and a dielectric mirror (7) which provides the ability to obtain high value of reflectivity.